


RT Pico MS



- Highest Precision
 - For the smallest components 0402 down to 01005
 - Short tip-to-grip distance
- Soldering Iron: WXPP MS

RT Micro MS

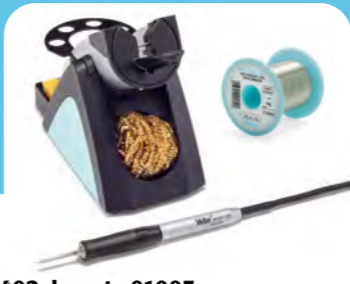

- Versatile performance
 - For micro and standard components
 - Widest range of geometries & sizes
- Soldering Iron: WXMP MS / WMRP MS


RT Ultra MS



- Maximum power
 - For heavy duty applications & largest components
 - Thermal Core Technology for optimized heat transfer through the joint
- Soldering Iron: WXUP MS

	article	a / b (mm) (inch)		article	a / b (mm) (inch)		article	a / b (mm) (inch)
Conical 	RTP 001 C MS T0050101399	0.1 0.004		RTM 001 C NW MS T0054462571N	0.1 0.004		RTU 004 C MS T0050104999	0.4 0.016
	RTP 001 C MS NW T0050101499	0.1 0.004		RTM 002 C MS T0054461499N	0.2 0.008		RTU 008 C MS T0050105099	0.8 0.031
	RTP 002 C MS T0050101599	0.2 0.008		RTM 002 C L MS T0050100199	0.2 0.008		RTU 016 C MS T0050105199	1.6 0.063
	RTP 004 C MS T0050101699	0.4 0.016		RTM 004 C X MS T0054463399N	0.4 0.016		RTU 004 C X MS T0050105299	0.4 0.016
	RTP 001 C X MS T0050101799	0.1 0.004		RTM 005 C X MS T0054463299N	0.5 0.019		RTU 008 C X MS T0050105399	0.8 0.031
	RTP 002 C X MS T0050101899	0.2 0.008		RTM 008 C MS T0054461799N	0.8 0.031		RTU 016 C X MS T0050105499	1.6 0.063
Bevel Cut 	RTP 004 B MS T0050101999	0.4 0.016		RTM 004 B MS T0050100399	0.4 0.016		RTU 020 B MS T0050105599	2.0 0.079
	RTP 012 B MS T0050102099	1.2 0.047		RTM 012 B MS T0054460699N	1.2 0.047		RTU 035 B MS T0050105699	3.5 0.138
Chisel 	RTP 002 S MS T0050102199	0.2 / 0.1 0.008 / 0.004		RTM 003 S NW MS T0054462671N	0.3 / 0.1 0.012 / 0.004		RTU 015 S MS T0050105899	1.5 / 0.4 0.059 / 0.016
	RTP 002 S NW MS T0050102299	0.2 / 0.1 0.008 / 0.004		RTM 004 S MS T0054461599N	0.4 / 0.15 0.016 / 0.006		RTU 022 S MS T0050105999	2.2 / 0.6 0.087 / 0.024
	RTP 004 S MS T0050102399	0.4 / 0.2 0.016 / 0.008		RTM 006 S MS T0050100499	0.6 / 0.4 0.024 / 0.016		RTU 032 S MS T0050106099	3.2 / 0.8 0.126 / 0.031
	RTP 008 S MS T0050102499	0.8 / 0.3 0.031 / 0.012		RTM 008 S MS T0054462399N	0.8 / 0.4 0.031 / 0.016		RTU 032 S L MS T0050106199	3.2 / 0.8 0.126 / 0.031
	RTP 010 S MS T0050102599	1.0 / 0.3 0.039 / 0.012		RTM 008 S X MS T0054461999N	0.8 / 0.4 0.031 / 0.016		RTU 050 S MS T0050106299	5.0 / 1.2 0.197 / 0.047
	RTP 013 S MS T0050102699	1.3 / 0.3 0.051 / 0.012		RTM 010 S MS T0050100699	1.0 / 0.3 0.039 / 0.012		RTU 076 S MS T0050106399	7.6 / 1.5 0.299 / 0.059
				RTM 013 S MS T0054461699N	1.3 / 0.4 0.051 / 0.016		RTU 093 S MS T0050106499	9.3 / 2.0 0.366 / 0.079
				RTM 013 S X MS T0054460373N	1.3 / 0.5 0.051 / 0.019			
				RTM 015 S MS T0054461899N	1.5 / 0.4 0.059 / 0.016			
				RTM 018 S MS T0050100899	1.8 / 0.4 0.071 / 0.016			
				RTM 022 S MS T0054462299N	2.2 / 0.4 0.087 / 0.016			
				RTM 032 S MS T0050101099	3.2 / 0.9 0.126 / 0.035			
				RTM 036 S MS T0054463199N	3.6 / 0.9 0.141 / 0.035			

- ▶ 100% potential-free soldering tips (RTP MS & RTM MS only)
- ▶ Different sizes & geometries to solve every soldering challenge
- ▶ Toolless tip change
- ▶ Patented tip-and-grip in one single unit
- ▶ Triple awarded Soldering Tips and Tools
- ▶ Boomerang handle design

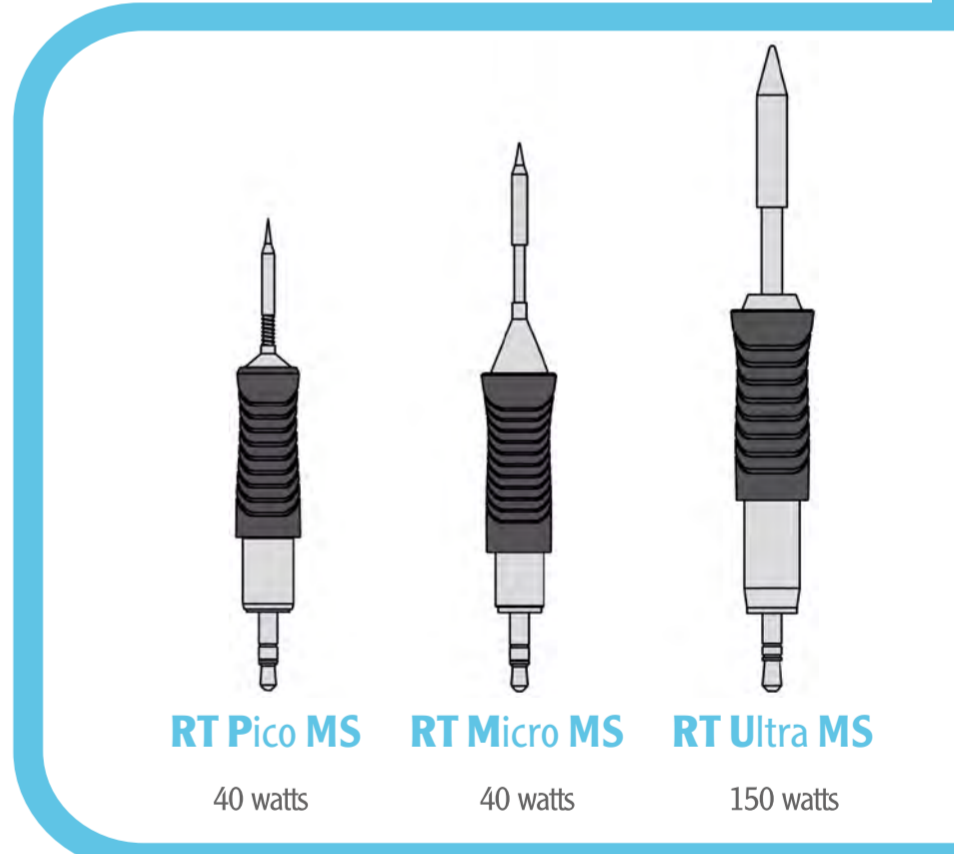

Knife 	RTP 010 K MS T0050102799	1.0 0.039		RTM 025 K MS T0050101299	2.5 0.098		RTU 020 G MS T0050106599	2.0 0.079
	RTP 010 K MS NW T0050102899	1.0 0.039		RTM 030 K MS T0054462199N	3.0 0.118		RTU 006 C L MS T0050107099	0.6 mm 0.023 Inch
	RTP 025 K MS T0050102999	2.5 0.098					RTU 003 C L MS T0050107199	0.3 mm 0.011 Inch
Gullwing 	RTP 020 G MS T0050103099	2.0 0.079		RTM 020 G MS T0054462499N	2.0 0.079		RTU 006 S L MS T0050107399	0.6 x 0.3 mm 0.023 x 0.011 Inch
							RTU 012 S L MS T0050107499	1.2 x 0.3 mm 0.047 x 0.011 Inch
Measuring tip RTM 028 X T0054461399N				Blade 	RTU 100 K MS T0050106699	10.0 0.393	RTU 010 C L MS T0050107599	1.0 mm 0.039
	● Mil-Spec soldering tip ● not wettable				RTU 160 K MS T0050106799	16.0 0.630	RTU 015 B L BEVEL CUT T0050107699	1.5 mm 0.047 x 0.011 Inch
				RTU 200 K MS T0050106899	20.0 0.078	RTU 022 L MS T0050107799	2.2 x 1.0 mm 0.087 x 0.039 Inch	
				RTU 330 K MS T0050106999	33.0 1.299	RTU 060 K L MS T0050107999	6.0 mm 0.236 Inch	
						RTU 018 S L MS T0050108099	1.8 x 0.8 mm 0.070 x 0.031 inch	

Weller®